



RECOMMENDATION OF STORING AND INSTALLING GINEGAR FILMS

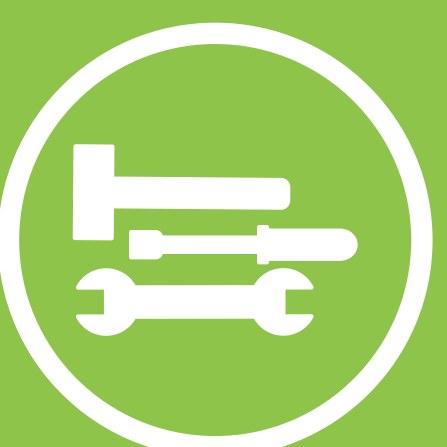


STORAGE OF THE ROLLS

- Keep under roof in a dry condition and low humidity
- Place on a pallets horizontally
- Keep the rolls in original packaging

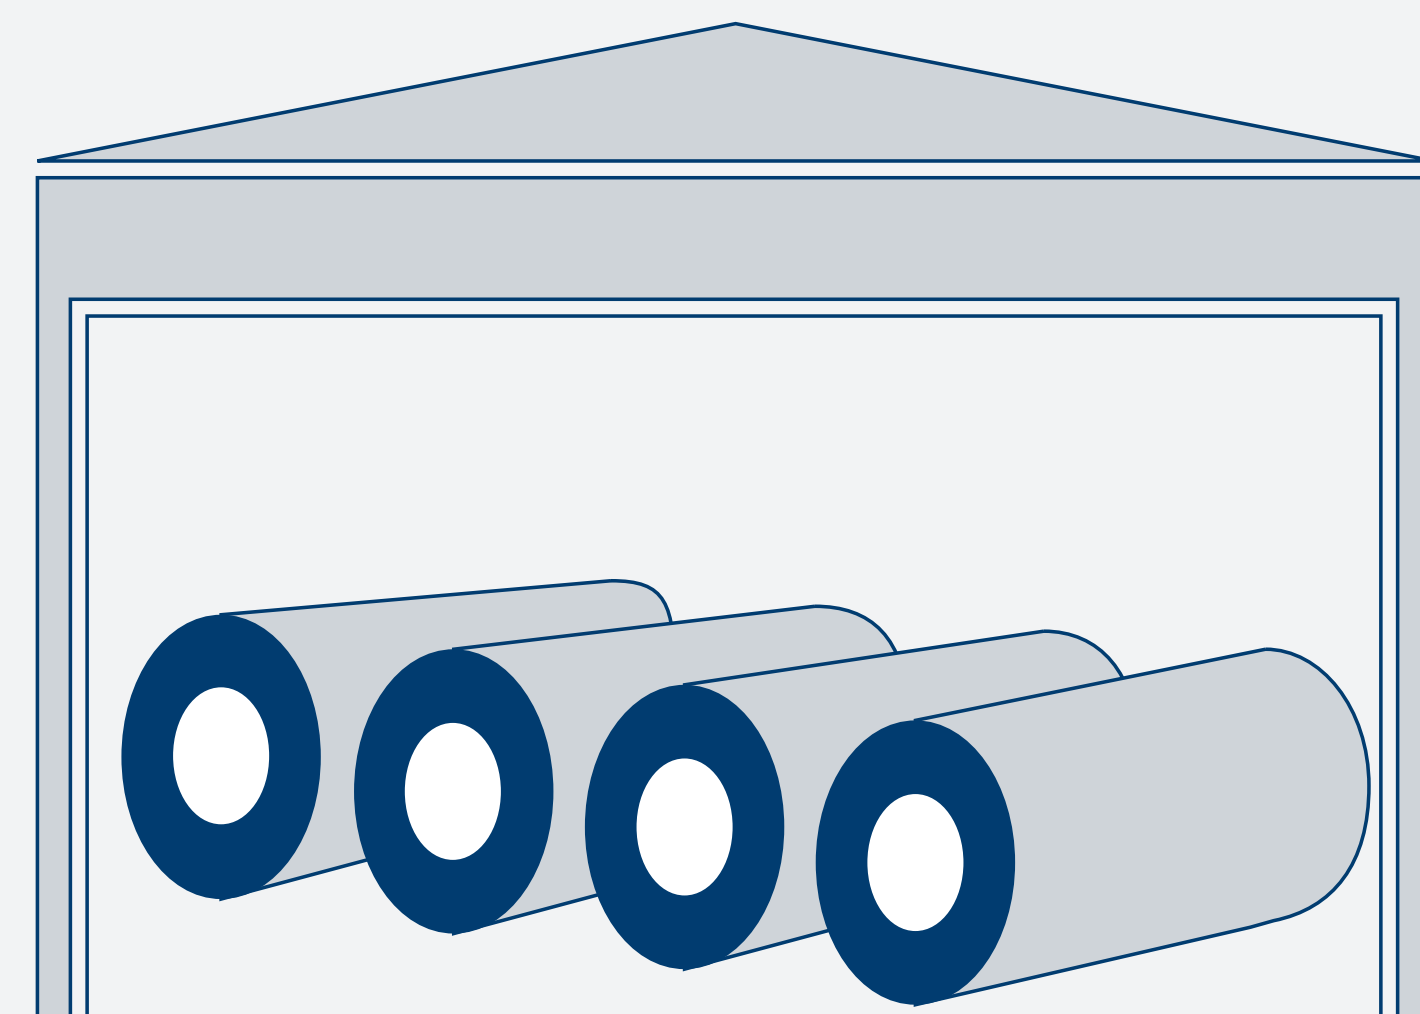

PREPARATION OF THE STRUCTURE FOR INSTALLATION

- Make sure, all frame parts which come in contact with the film are smooth and without any sharp edges
- Best time, following removing all films and before new film installation
- Tight All screws, springs and other parts of the structure
- Verified profile lockers and springs are in good shape.

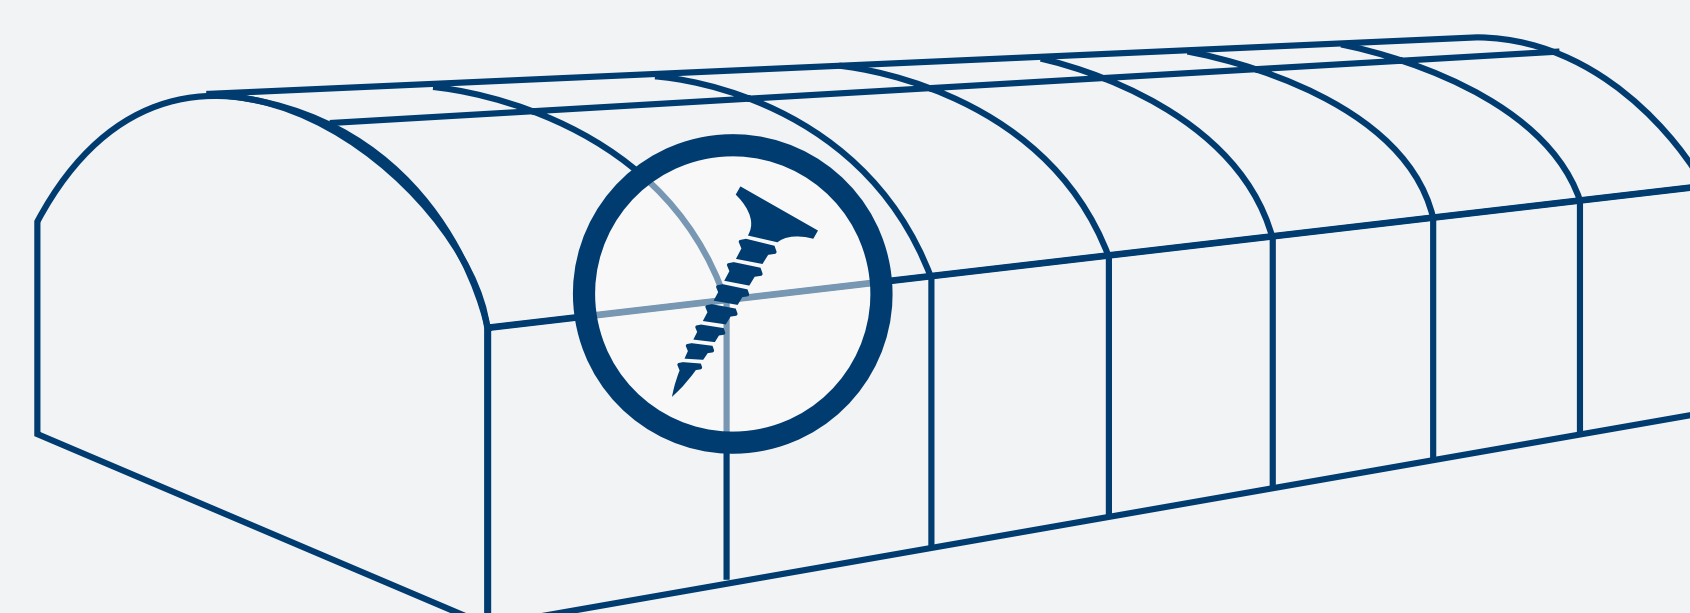

BEFORE INSTALLATION


Paint all areas of the structure that come in contact with the film



In order to lower temperature which is main factor to early premature film degradation



- Use only an acrylic white water based paint
- Paint only part of frame that are coming in contact with film
- Paint a narrow strip on the film, 2-3 days after installation, in all places of contact with frame

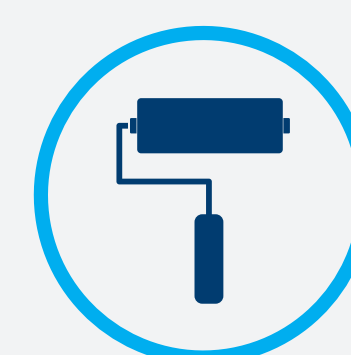

Preventing the damage of the film due to double action radiation.



AVERAGE TEMPERATURE

Install before winter with moderate tempter



No winds



No snow



No rain



No hail



FILM INSTALLATION

- In order to get good property performance, place the film on such away that Ginegar logo will be readable looking
- Notice - we provide our film indifferent way to fold.

